

**MIDDLESEX COUNTY COLLEGE**  
**Edison, New Jersey 08818-3050**

May 7, 2014

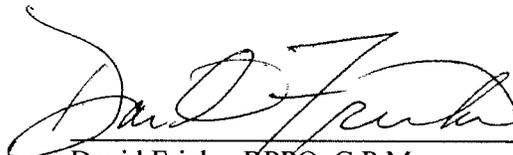
All Bidders

ADDENDUM NUMBER 1            BID # 14-47 Repair to Parking Lot # 2

Please see the attached document.

Please note the bid opening date has been changed to May 22, 2014 at 2 p.m.

THIS PAGE MUST BE REFERENCED IN YOUR BID RESPONSE.

A handwritten signature in black ink, appearing to read "David Fricke", written over a horizontal line.

David Fricke, RPPO, C.P.M.  
Director of Purchasing and Inventory

**MIDDLESEX COUNTY COLLEGE**

**REPAIR AREA OF PARKING LOT DAMAGED BY WATER LINE LEAK**

**BID # 14-47**

**ADDENDUM # 1**

**May 7, 2014**

The following changes are made to the Specifications and Drawings and are considered to be a part of the Bid Documents:

**Item # 1**

**Scope Of Work**

Due to increased deterioration of the damaged area, the Scope Of Work Items 1-5 a., b., e., f., g., i., and j., Pages C-3 and C-4 of Specification dated April 1, 2014, are hereby modified as follows:

- a. Saw-cut perimeter of damaged asphalt area (4" base with 2" top). See Sketch SK-1 Revision A, dated April 25, 2014 (see below). (Approx. 375 linear feet.)
- b. Remove and recycle of the damaged asphalt, approximately 5,340 square feet, at an off site facility. For safety reasons, a portion of the area, approximately 600 square feet, has been excavated and temporarily filled with sand and topped with approximately twelve (12) inches of DGA. Remove and stockpile this approximate 600 cubic feet of temporarily installed dense graded aggregate. This DGA is to be reused during restoration.
- c. No change.
- d. No change.
- e. Install geotextile soil support fabric. (Tencate Mirafi 500X or equal.) Approximately 5,945 square feet.
- f. Furnish, install and compact [compacted in maximum six (6) inch lifts] a minimum of six (6) inches of DGA backfill material to a minimum of 95% compaction. Utilize existing onsite suitable DGA (see "b" above) and supplement as needed. (Approximately 5,945 square feet.)
- g. Install approximately 5,945 square feet of four (4) inch bituminous base course, Mix I-2.

- h. No change.
- i. Install approximately 5,945 square feet of two (2) inch thick hot mix asphalt surface course, Mix I-5.
- j. Stripe affected parking spaces as per existing layout with four (4) inch wide white thermoplastic material to match existing. (Approximately 650 linear feet.)

**Item # 2**

Sketch SK-1 Revision A., dated 4/25/2014, replaces Sketch SK-1, dated 3/21/2014.



**Item # 3**

Change to the time constraints as follows: If the Board of Trustees of Middlesex County College has approved an award at least 10 days prior to July 3, 2014 the contractor shall begin work July 7, 2014 and work must be completed by August 8, 2014. **END OF ADDENDUM # 1**