



May 19, 2014

All Bidders

ADDENDUM NUMBER 2

BID # 14-47 Repair Parking Lot # 2

Please note this bid opening date has been changed to May 29, 2014 at 2:00 p.m.

Please see the attached addendum.

THIS PAGE MUST BE REFERENCED IN YOUR BID RESPONSE.

A handwritten signature in black ink, appearing to read "David Fricke", written over a horizontal line.

David Fricke, RPPO, C.P.M.
Director of Purchasing and Inventory

MIDDLESEX COUNTY COLLEGE

REPAIR AREA OF PARKING LOT DAMAGED BY WATER LINE LEAK

BID # 14-47

ADDENDUM # 2

May 19, 2014

The following changes are made to the Specifications and Drawings and are considered to be a part of the Bid Documents. This Addendum supersedes Addendum #1 dated April 25, 2014.

Item # 1

Scope Of Work


The heavy rain during the week of April 28th increased the deterioration of the damaged area, the Scope Of Work Items 1-5 a., b., e., f., g., i., and j., Pages C-3 and C-4 of Specification dated April 1, 2014, are hereby modified as follows.

- a. Saw-cut perimeter of damaged asphalt area (4" base with 2" top). See Sketch SK-1 Revision B, dated May 9, 2014 (below). (Approx. 585 linear feet.)
- b. Remove and recycle of the damaged asphalt, approximately 8,785 square feet, at an off site facility. For safety reasons, a portion of the area, approximately 600 square feet, has been excavated and temporarily filled with sand and topped with approximately twelve (12) inches of DGA. Remove and stockpile this approximate 600 cubic feet of temporarily installed dense graded aggregate. This DGA is to be reused during restoration.
- c. No change.
- d. No change.
- e. Install geotextile soil support fabric. (Tencate Mirafi 500X or equal.) Approximately 9,390 square feet.

- f. Furnish, install and compact [compacted in maximum six (6) inch lifts] a minimum of six (6) inches of DGA backfill material to a minimum of 95% compaction. Utilize existing onsite suitable DGA (see "b" above) and supplement as needed. (Approximately 9,390 square feet.)
- g. Install approximately 9,390 square feet of four (4) inch bituminous base course, Mix I-2.
- h. No change.
- i. Install approximately 9,390 square feet of two (2) inch thick hot mix asphalt surface course, Mix I-5.
- j. Stripe affected parking spaces, crosswalks, "STOP" lettering with line and "No Parking" hatched areas as per existing layout with thermoplastic material to match existing.
 - 1. Four (4) inch wide white parking space - approximately 620 linear feet.
 - 2. Six (6) inch wide white dividing line – approximately 150 linear feet.
 - 3. "No Parking" yellow hatched areas - approximately 80 linear feet six (6) inch wide and approximately 70 linear feet of twenty-four (24) inch wide as hatching.
 - 4. One and one half white crosswalks – approximately 105 linear feet six (6) inch wide sides and approximately 60 linear feet of twelve (12) inch wide for crosswalk hatching.
 - 5. Twenty-four (24) inch wide white line at "STOP" lettering – approximately 12 linear feet.
 - 6. One white "STOP" word – approximately five (5) feet high.

Item # 2

Sketch SK-1 Revision B (below), dated 5/9/2014, replaces Sketch SK-1 Revision A., dated 4/25/2014 and Sketch SK-1, dated 3/21/2014.

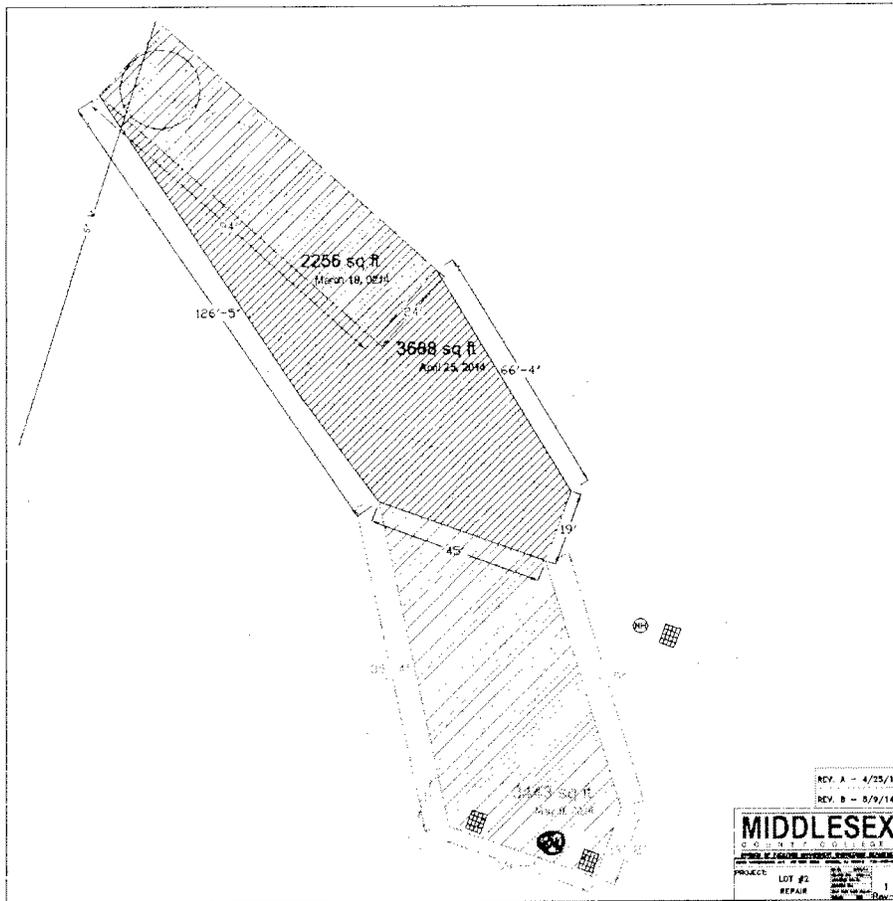

END OF ADDENDUM # 2