

MIDDLESEX COUNTY COLLEGE
Edison, New Jersey 08818-3050

March 5, 2015

All Bidders


ADDENDUM NUMBER 1

BID # 15-28 Installation of LED Campus Message
Boards

Please see the attached document.

Please note the bid opening date has been changed to March 17, 2015 at 2 p.m.

THIS PAGE MUST BE REFERENCED IN YOUR BID RESPONSE Page D-2.

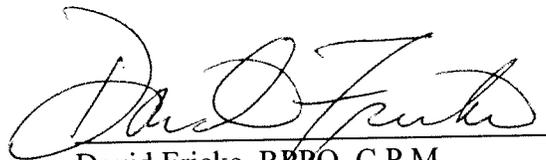

David Fricke, RPPO, C.P.M.

Director of Purchasing and Inventory

MIDDLESEX COUNTY COLLEGE
INSTALLATION OF CAMPUS LED MESSAGE BOARDS

BID # 15-28

ADDENDUM # 1

MARCH 5, 2015

The following are clarifications of the Specifications and Drawings and are considered to be a part of the Bid Documents:

Item # 1

On drawings A-1 through A-6, the data conduit (fiber optic) shall be increased from 1" to 2". Provide 2" conduit for all data runs.

Item # 2

Question: According to the specs they need 62.5 multimode fiber pre terminated ST To ST connectors. Hubble equivalent But they're asking for a total of (4), 4 Strands fiber to each sign total of 8 runs of 4 strand fiber. The 2 signs could run all off 1/ 12 strand easily. Would this be acceptable? Can we run a 1/12 fiber to each sign or 4 / 4 stand fibers (4 runs) to each sign?

Response: Yes, 1/12 fiber is acceptable to each sign, as long as 4 strands are terminated at each end. To clarify, (4) strands are required at each LED sign, not (4) runs of 4 strands each as may be read on drawing A-1.
Note #2 on Drawing A-1, it should read "Install (4) strands of 62.5 micron fiber Ethernet cables to each LED message board, a total of (8) strands."

END OF ADDENDUM # 1